

# E Technical Information for Pro-L Mill

## Selection of grades and chip breaker

Category	M (Stainless steel)	N (Aluminum alloy)	S (HRSA)
Grades	PC5300/PC5400	H01	PC5300/PC5400
MA	-	○	-
ML	○	-	○

## Application examples

### N Al6061 (HRC30)


#### Cutting condition

$v_c = 500 \text{ m/min}$ ,  $f_z = 0.2 \text{ mm/t}$ ,  
 $a_p = 30\sim 60 \text{ mm}$ ,  
 $a_e = 1\sim 5 \text{ mm}$  (finishing: 1 mm, roughing: 5 mm)  
 $z = 3$




## Pro-L Mill ramping & helical cutting technical data


1. Ramping

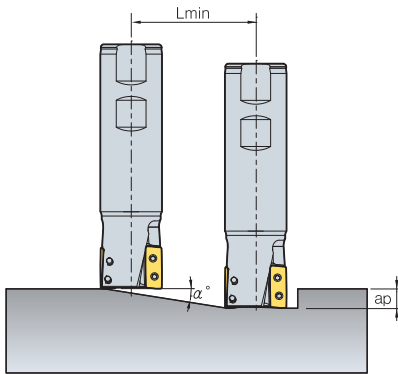

2. Blind hole helical cutting



3. Thru hole helical cutting



Designation	ØD (mm)	Ramping		Blind hole helical cutting				Thru hole helical cutting	
		α° (max)	Lmin (mm)	ØDH Max (mm)	dmax (mm)	ØDH Min (mm)	dmax (mm)	ØDH Min (mm)	dmax (mm)
PALS032HR-2S20	32	3.37	170	62	3.6	60	3.5	55	3.2
PALS032HR-2S25	32	3.37	170	62	3.6	60	3.5	55	3.2
PALS032HR-2S32	32	3.37	170	62	3.6	60	3.5	55	3.2
PALS040HR-2S32	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-2S40	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-2S42	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-3S32	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-3S40	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS040HR-3S42	40	2.12	270	78	2.9	76	2.8	71	2.6
PALS050HR-3S32	50	2.08	275	98	3.6	96	3.5	91	3.3
PALS050HR-3S40	50	2.08	275	98	3.6	96	3.5	91	3.3
PALS050HR-3S42	50	2.08	275	98	3.6	96	3.5	91	3.3
PALS063HR-4S32	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HR-4S40	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HR-4S42	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HM-4S32	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HM-4S40	63	1.76	325	124	3.8	122	3.8	117	3.6
PALS063HM-4S42	63	1.76	325	124	3.8	122	3.8	117	3.6
PALCM063HR	63	1.76	325	124	3.8	122	3.8	117	3.6

• Lmin: When  $a_p = 10 \text{ mm}$

• Lmin: Minimum inclination cutting length

α° : Max. ramping angle

a<sub>p</sub> : Depth of cut

$$L_{min} = \frac{a_p}{\tan \alpha^\circ} \text{ (mm)}$$

