
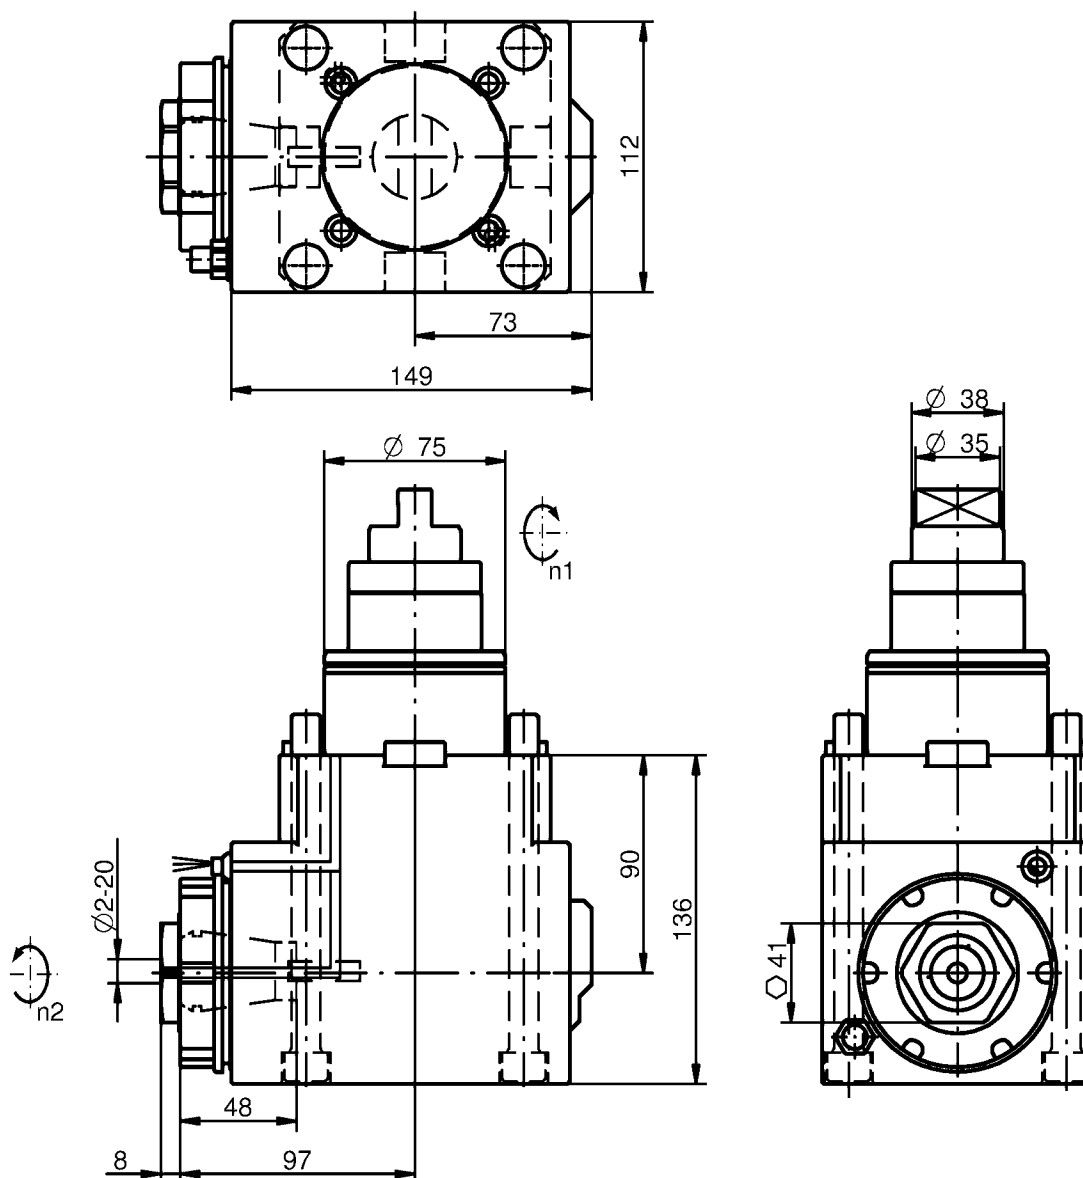


Face drill/milling unit - for ER collets DIN 6499B

Internal and external coolant supply - Do not run without coolant! Only use filtered coolant fluid (max. particle size = 50 µm)

Max. coolant pressure = 1160 PSI (80 bar)

180° reversible

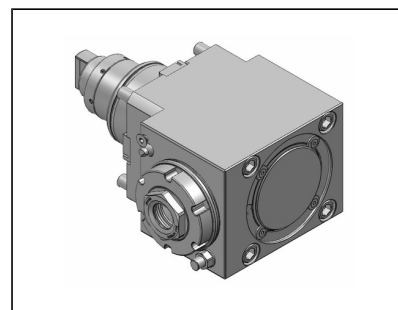

Item No.	Shaft-Ø	Tool Clamping	Tool-Ø	Torque(Nm)	n2 max(rpm)	i (n1:n2)
420532015-75	75	ER-32 QF	2-20	40	8,000	1:2

Accessories
(not included)



0067732001
One-hand Wrenches



191032xxx
Collets ER 32 sealed, for IC



320032xxx
ER-32QF collet chuck adapter