


MODELLI DI TORNIO COMPATIBILI COMPATIBLE LATHE TYPES

VDI 20 / VDI 30 / VDI 40 / VDI 50

Vedi pagine compatibilità 5.2 / 5.3 - See compatibility pages 5.2 / 5.3



NEW

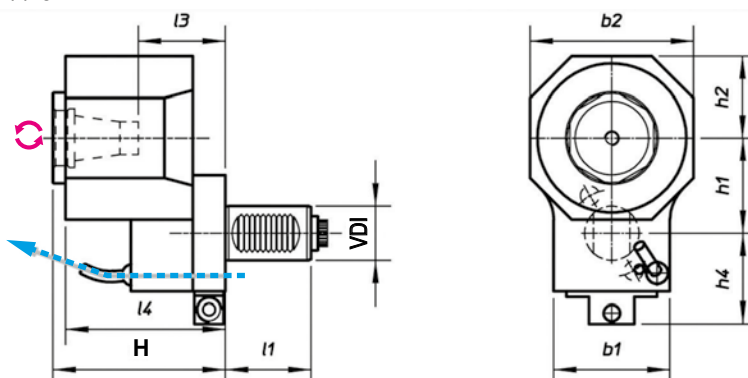

TIPO - TYPE
Disassato
Offset Axis



USCITA - OUTPUT
Porta Pinza
Collet Chuck



REFRIGERANTE
COOLANT
Esterno
External




RATIO
2:1



ROTAZIONE - ROTATION
Opposto al mandrino
Opposite to machine spindle

Code	VDI	Output	Int Cool.	I1	H	I4	b1	b2	h1	h2	h4	Nm	Rpm	kw	
99.ST.8083	30	ER-25 - Ø1+16	NO	55	95	88	64	90	52,5	45	54	64	3.000	8	
99.ST.80111	30	ER-32 - Ø2+20	NO	55	100,25	88	-	90	-	-	-	63	2.500	8	
99.ST.80112	40	ER-32 - Ø2+20	NO	63	99	92	76	108	68,5	54	65,5	100	2.000	10	

NEW

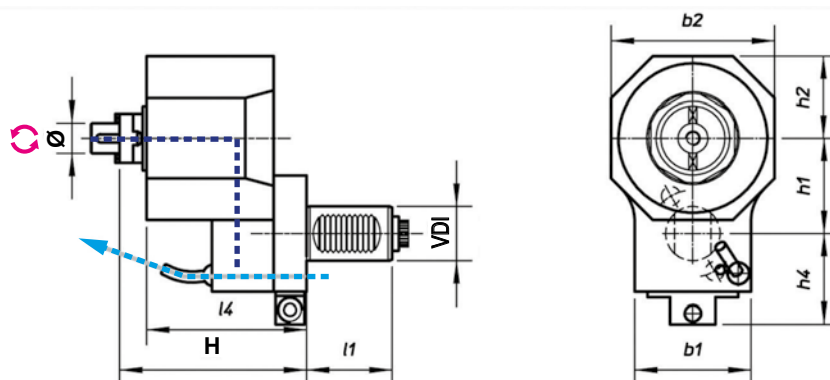

TIPO - TYPE
Disassato
Offset Axis



USCITA - OUTPUT
Porta Fresa
Shell End Milling Cutter



REFRIGERANTE
COOLANT
Esterno
External



RATIO
2:1



ROTAZIONE - ROTATION
Opposto al mandrino
Opposite to machine spindle

Code	VDI	Output	Int Cool.	I1	H	I4	b1	b2	h1	h2	h4	Nm	Rpm	kw	
99.ST.8084	30	Ø22	NO	55	95	88	64	90	52,5	45	54	64	3.000	8	
99.ST.80100	40	Ø22	NO	63	117	92	76	108	68,5	54	65,5	100	2.000	10	



MODELLI DI TORNIO COMPATIBILI COMPATIBLE LATHE TYPES

VDI 20 / VDI 25 / VDI 30 / VDI 50


Vedi pagine compatibilità 5.2 / 5.3 - See compatibility pages 5.2 / 5.3




NEW

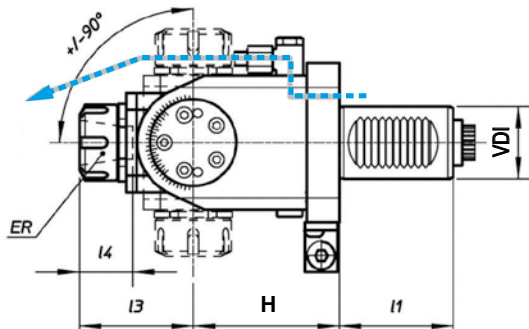

**SINISTRO - LEFT
(Standard)**



**DESTRO - RIGHT
(Specify)**



TIPO - TYPE

**Orientabile
Adjustable $\pm 90^\circ$**



USCITA - OUTPUT

**Porta Pinza
Collet Chuck**



REFRIGERANTE
COOLANT

**Esterno
External**



RATIO



1:1




ROTAZIONE - ROTATION

**Opposto al mandrino
Opposite to machine spindle**


Code	VDI	Output	Int Cool.	I1	H	I3	I4	b1	b2	h1	h2	Nm	Rpm	kw	
99.ST.8086	25	ER-16 - $\varnothing 1 \pm 10$	NO	48	55	54	34,5	70,5	38	65	49,5	10	6.000	2	
99.ST.8097	25	ER-20 - $\varnothing 1 \pm 13$	NO	48	70	52	37	70	37	64	54	15	6.000	3	
99.ST.8087	30	ER-20 - $\varnothing 1 \pm 13$	NO	55	64	52	37	70	37	64	54	15	6.000	3	
99.ST.8088	30	ER-20 - $\varnothing 1 \pm 13$	NO	55	97	52	37	70	37	64	54	15	6.000	3	
99.ST.8089	40	ER-25 - $\varnothing 1 \pm 16$	NO	63	81	63	42	87	47	88	71	25	4.000	4	
99.ST.8098	40	ER-25 - $\varnothing 1 \pm 16$	NO	63	120	63	42	87	47	88	71	25	4.000	4	
99.ST.8096	50	ER-32 - $\varnothing 2 \pm 20$	NO	78	123	101	47	134	54	108	78	50	4.000	6	

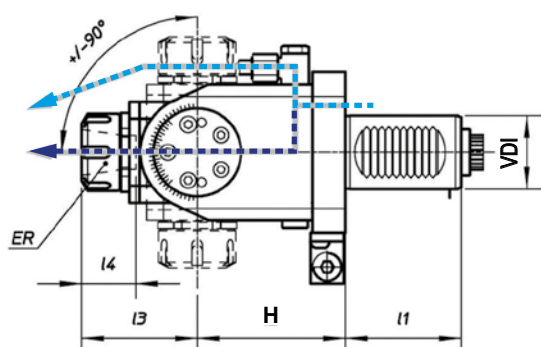

**SINISTRO - LEFT
(Standard)**



**DESTRO - RIGHT
(Specify)**



TIPO - TYPE

**Orientabile
Adjustable $\pm 90^\circ$**



USCITA - OUTPUT

**Porta Pinza
Collet Chuck**



REFRIGERANTE
COOLANT

25BAR



RATIO

1:1



ROTAZIONE - ROTATION

**Opposto al mandrino
Opposite to machine spindle**

Code	VDI	Output	Int Cool.	I1	H	I3	I4	b1	b2	h1	h2	h4	Nm	Rpm	kw	
99.ST.8091	30	ER-20 - $\varnothing 1 \pm 13$	✓	55	64	37	52	37	70	37	64	54	15	6.000	3	
99.ST.8092	30	ER-20 - $\varnothing 1 \pm 13$	✓	55	97	37	52	37	70	37	64	54	15	6.000	3	
99.ST.8093	40	ER-25 - $\varnothing 1 \pm 16$	✓	63	81	42	63	42	87	47	88	71	25	4.000	4	